Pobrano z mamadecor.pl

Hansen Ceiling Pendant Fitting

INSTRUCTION MANUAL

Safety Warnings

- This product is only suitable for connection to a 240V~50Hz supply in accordance with current IEE wiring regulations, and should be installed in accordance with local building regulations. It is for indoor use only, and is **not** suitable for a bathroom location.
- Before installing your light ýtting always switch off the mains supply, and remove the appropriate fuse or switch off the appropriate circuit breaker before commencing installation. Ensure that no one else has access that would enable the supply to be inadvertently reconnected.
- **This is a Class 1 product and must be Earthed.** The terminal blocks are supplied according to requirements of the ýtting.
- Never ýt bulbs of a higher wattage than those speciýed on the label (as these may cause overheating and damage the ýtting)
- This product may contain delicate parts ï be careful during handling and maintenance to avoid breakage.
- If you are in any doubt about your competence please consult a qualiýed electrician.
- If any modiýcation is made it will invalidate the warranty and may render the product unsafe.

Care Information

Allow 10 minutes to cool before replacing, adjusting or cleaning.
Clean with a dry cloth only. Do not use liquid or abrasive cleaners on this product.

Assembly/ User Instructions

Before you start


Please read these instructions carefully before ýtting and retain for reference. Check the packaging and make sure that you have all the required parts. Follow each assembly step in order to prevent incorrect assembly. Ensure that the product is fully assembled as illustrated before use.

The Light pack contains:
Light ýtting
Terminal connection block(s)
Fixing pack

The following tools may be required:
Selection of cross and þat head screwdrivers.
Electric drill and assorted drill bits.
Wire strippers.
Electrical insulation tape

These assembly diagrams are intended as a guide ï if in doubt consult a qualiýed electrician.

1. Decide on the position of the light ýtting, or remove existing light ýtting. Take a note of the position of the electrical connections. Ensure there is a solid mounting surface, preferably a wooden joist or joist bridge to support the weight of the light ýtting.
2. Remove the ýxing bracket (A) from the ceiling cover and attach to the ceiling using the screws provided. Ensure there is a joist at the point of ýxing to support the weight of the product. Take care to avoid damaging any concealed wiring and pipes.
3. If you wish to reduce the hanging height of this product, the length of the cable will need to be reduced. It will be necessary to shorten the cable before installation takes place. The cable can be reduced in length by adjusting the cable clamp. Firstly, work out the new height at which the product will hang. Carefully loosen the screw in the cable clamp in the ceiling cover. Feed the cable through the clamp and into the ceiling cover. When the desired length of cable is reached, retighten the clamp.

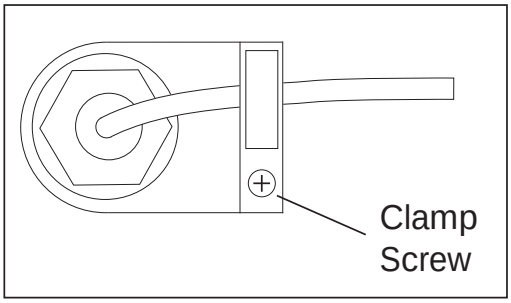


Endon Lighting, LS9 0SE

76713-Hansen-P 20181018

Pobrano z mamadecor.pl

Assembly/ User Instructions

4. Support your ýtting and connect the house wiring to the terminal block ï see expanded wiring details below. The 4th terminal block connector is used for the ñloopò wires of the ñRing Circuitò. There may be more than one set of cables in the ñloopò connections. If there is a ñRing Circuitò and you do not understand the connections you must consult an electrician.
5. This product has ñLò shaped ýxing holes to allow easy ýxing to the ceiling strap. Locate the ñLò slots around the small screws (B) on the ceiling strap (A). Rotate the ceiling cover to attach the product to the strap. Tighten the screws to secure. Take care not to trap any wiring.
6. Fit the shade (C). Place the shade over the threaded lampholder (D), followed by the silicone ring (E) and metal washer (F). Secure in place with the shade ring (G).
7. Fit the bulb (H - not supplied). **NOTE: Never ýt bulbs of a higher wattage than those speciýed on the label (as these may cause overheating and damage the ýtting).**
8. Turn on the power and test.

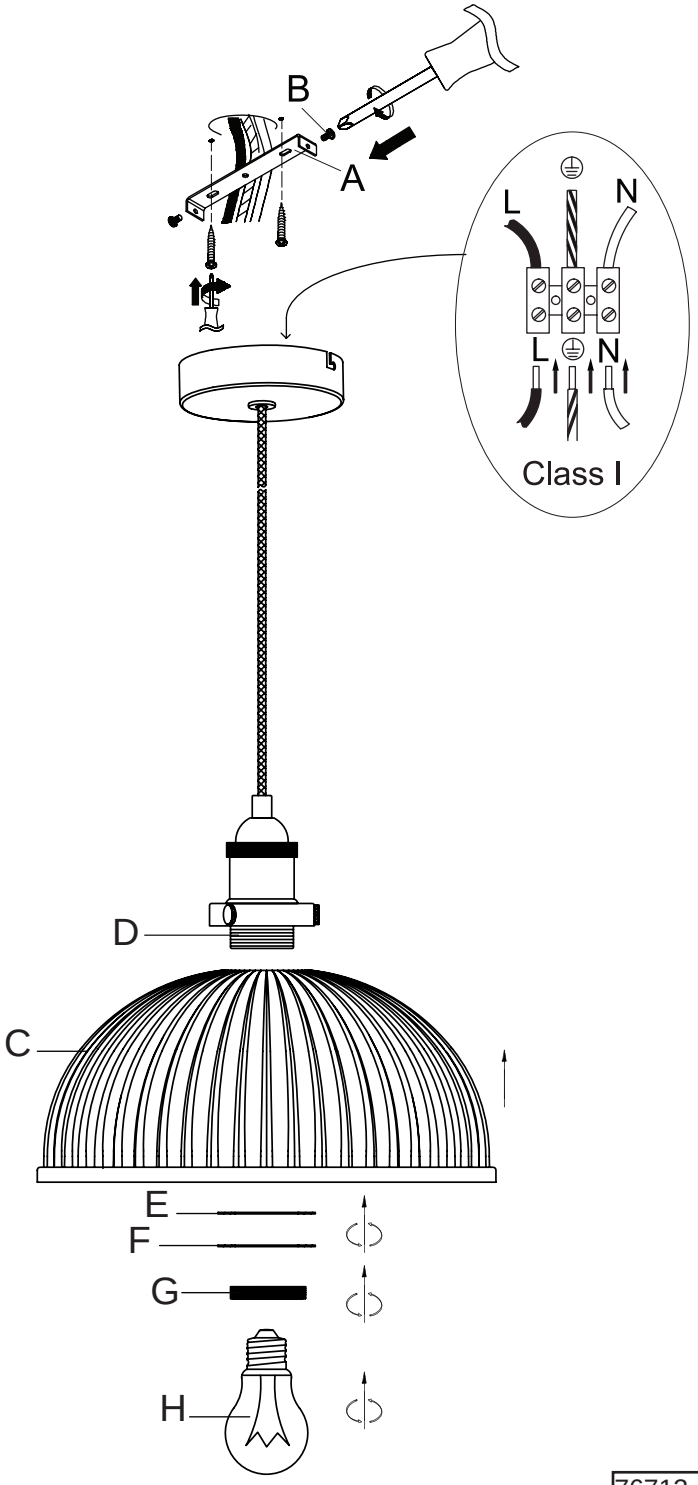

Endon Lighting, LS9 0SE

76713-Hansen-P 20181018