Pobrano z mamadecor.pl


Commissioning


- Pcnj_ac rfc amtcp ml rfc rcpkgl_j `jmai,
- Jgdr rfc npmbsar glrm nj_ac _lb _jgel rfc qapcu fmjcq sn with the holes on the bracket.
- Sqgle rfc qsnnjgcb _jjcl icw* rgefrcl rfc qapcuq rm secure. Take care not to trap any wiring.
- Pcnj_ac dsqc mp agpasgr `pc_icp _lb qugraf ml, Wmsp jgefr is now ready for use.

Fitting/replacing bulbs

- Ufcl af_legle _ `sj`* _ju_wq qugraf mdd _r rfc k_glq _lb _jjmu rfc `sj` rm ammj `cdmpc f_lbjgle, Sqcb `sj`q should not be disposed of with household waste. Please recycle where facilities exist.
- ?ju_wq sqc rfc amppcar rwnc _lb u_rr_ec `sj`, Sqgle rfc incorrect wattage bulb will damage the product.
- Sqc _ qmdr ajmrf rm f_lbjc `sj`q* _tmgb bgpcarjw rmsafgle the bulbs as this will shorten their life.
- Slqapcu rfc qf_bcq _lrgajmaiugqc, Pckmtc `sj` `w turning a quarter turn anticlockwise and pulling out.
- Nsqf rfc `sj` eclrjw glrm rfc j_knfmjbcp _lb rugqr _ quarter turn clockwise to engage pins. Replace the shade by gently screwing on.

35W GU10
Mains Halogen





We recommend cleaning with a soft dry cloth.
Do not use solvents or abrasive cleaners as these could damage the finish.

Glass parts – Wipe clean with a damp cloth. Do not use abrasive materials as these will damage the finish.

Recycling advice

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

For your safety, always switch off the supply before changing lightbulbs, or cleaning.



This bulb is protected by a glass shade. This part must be replaced immediately should the glass shade become cracked or damaged. This fitting must not be used without the glass shade in place.

Iss.3 13022017

Instruction leaflet

Knight Spotlight

39168

CE

Pobrano z mamadecor.pl

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This light fitting is double insulated (class 2) and does not require connection to an Earth circuit

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

Always use the correct type and wattage bulb. Never exceed the wattage stated.

When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully and responsibly. This product is suitable for dimming when used in conjunction with a dimmable lamp. Please ensure verification of dimming abilities with the lamp manufacture prior to use.


Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Specification


Voltage:	240V 50Hz a.c.
J_kn8	**1 v 13U ES/ . F_jmecl**
IP rating:	44

Layout

- **Nj_l rfc bcqgpcb j_wmsr md rfgq dgrrgle a_pcdsjjw* clqspgle** the cables will reach the distance between the junction box and the light fitting
- **?tmgb jma_rgle _lw a_`jcq gl nmqgrgmlq rf_r umsjb a_sqc** a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged
- **Rfc k_glq qsnnjw a_`jc ksqr f_tc _ kglgksk apmqq** sectional area of 1.0mmï¿½
- **Rfgq npmbsar ksqr `c kmslrcb msr md _pkq pc_af,**
- **Rfgq npmbsar f_q qncag_j npmrcargml _e_glqr rfc glepcqq** of moisture and is IP44 rated.

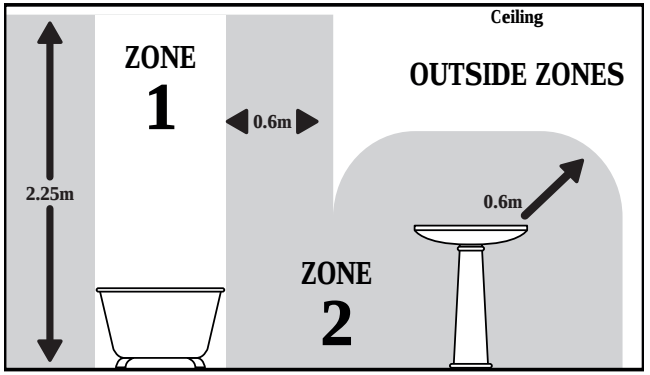

This product is suitable for use in Zone 2 and outside Zones of a bathroom. See diagram. If this unit is being fitted in a room containing a bath or shower, a 30mA RCD must be used, in accordance with IEE regulations.



Spotlights give a concentrated beam of light and must not be positioned any closer than 0.2M (20cm) to the illuminated surface.


Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires**.

- **Slbm rfc qapcuq fmjbgle rfc dgvgle `p_aicr** in place and set aside
- Hold the product in place and mark the position of the holes.
- Ensure the ceiling is capable of holding the weight of the product. Take care to avoid damaging any concealed wiring and pipes.The correct fixings should be used. Ensure there is a joist at the point of fixing to support the weight of the product.
- Fix the ceiling bracket into position.

Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole and connect to the connection block inside the product in the following way: This unit is double insulated and must not be earthed. If there are any incoming earth cables, they must be joined together and well insulated with good quality insulation tape. This is to ensure earth continuity throughout your property.

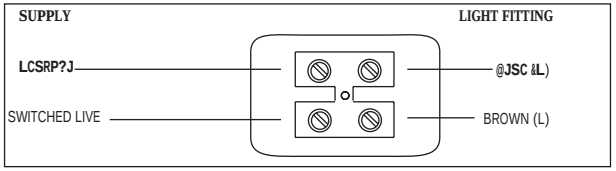

Check that...

- **Wms f_tc ampgcarjw gbclrgdgcb rfc ugpcq**
- The connections are tight
- No loose strands have been left out of the connection block.