
Pobrano z mamadecor.pl

STRAIGHT LED WALL L 9612 WH

STRAIGHT LED WALL M 9617 GR

STRAIGHT LED WALL S 9613 SI

STRAIGHT WALL XS 6345 WH




STRAIGHT WALL XS

stal lakierowana / painted steel / zŢZ8ÔĘƷŢàŢ ôÔŢzŁ

6345 WH 6354 SI 6350 GR

1×E14, max 40W




STRAIGHT LED WALL M

stal lakierowana / painted steel / zŢZ8ÔĘƷŢàŢ ôÔŢzŁ

9611 WH 9614 SI 9617 GR

T8, 16W LED, included




STRAIGHT LED WALL S

stal lakierowana / painted steel / zŢZ8ÔĘƷŢàŢ ôÔŢzŁ

9610 WH 9613 SI 9618 GR

T8, 11W LED, included




STRAIGHT LED WALL L

stal lakierowana / painted steel / zŢZ8ÔĘƷŢàŢ ôÔŢzŁ

9612 WH 9615 SI 9616 GR

T8, 22W LED, included

NAME	SIZE	POWER	COLOUR TEMP.	LUMINOUS FLUX	BEAM ANGLE	COLOUR RENDERING INDEX (CRI >)	INPUT	POWER FACTOR	LIFETIME	MATERIAL
LED TUBE T8	60 cm	11W	3000K	950-1000 lm	200°	80	~230V, 50Hz	> 0,9	25 000 h	CLEAR GLASS
LED TUBE T8	90 cm	16W	3000K	1400-1500 lm	200°	80	~230V, 50Hz	> 0,9	25 000 h	CLEAR GLASS
LED TUBE T8	120 cm	22W	3000K	2000-2100 lm	200°	80	~230V, 50Hz	> 0,9	25 000 h	CLEAR GLASS

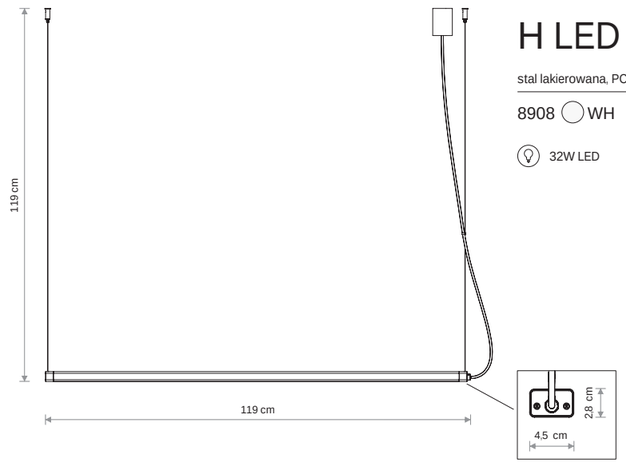

H LED

stal lakierowana, PC / painted steel, PC / zŢZ8ÔĘƷŢàŢφ ôÔŢzŁ, PC

8908 WH 8910 WH/BL

32W LED

Item No.	INPUT POWER	COLOUR TEMP.	LUMINOUS FLUX	LUMINAIRE EFFICIENCY	COLOUR RENDERING INDEX (CRI ≥)	INPUT	LIFETIME
8908, 8910	36W LED	3000K	2700 lm	75	80	~230V, 50Hz	50 000 h