
Pobrano z mamadecor.pl

**SPIKE LED** 9098 BL

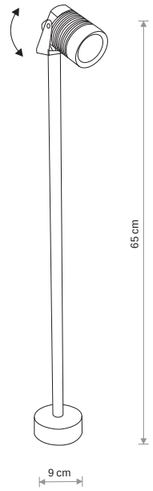



# SPIKE LED

aluminium / aluminium / ŢzzḍÅ8ä88

9098 ● BL

**SPIKE LED** 9100 BL





# SPIKE LED

aluminium / aluminium / ŢzzḍÅ8ä88

9100 ● BL

**SPIKE LED** 9101 BL




# SPIKE LED


aluminium / aluminium / ŢzzḍÅ8ä88

9101 ● BL

| Item No. | POWER | COLOUR TEMP. | LUMINOUS FLUX | BEAM ANGLE | COLOUR RENDERING INDEX (CRI >) | INPUT | SAFETY TYPE | POWER FACTOR | INGRESS PROTECTION | LIFETIME |
|---|---|---|---|---|---|---|---|---|---|---|
| 9101 | 3W LED | 3000K | 115 lm | 35° | 80 | ~220-240V, 50Hz | ⏚ | 0,55 | IP 54 | 10 000 h |
| 9100 | 3W LED | 3000K | 115 lm | 35° | 80 | ~220-240V, 50Hz | ⏚ | 0,55 | IP 54 | 10 000 h |
| 9098 | 3W LED | 3000K | 115 lm | 35° | 80 | ~220-240V, 50Hz | ⏚ | 0,55 | IP 54 | 10 000 h |



**THIKA LED** 9120 BL





# THIKA LED

aluminium, szkło / aluminium, glass / ŢzzḍÅ8ä88, ŏŏŏ ŏ ŏ ŏ

9120 ● BL

**THIKA LED** 9121 BL





# THIKA LED

aluminium, szkło / aluminium, glass / ŢzzḍÅ8ä88, ŏŏŏ ŏ ŏ ŏ

9121 ● BL

**THIKA LED** 9118 BL

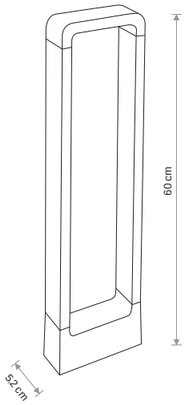


# THIKA LED

aluminium, szkło / aluminium, glass / ŢzzḍÅ8ä88, ŏŏŏ ŏ ŏ ŏ

9118 ● BL

| Item No. | POWER | COLOUR TEMP. | LUMINOUS FLUX | BEAM ANGLE | COLOUR RENDERING INDEX (CRI >) | INPUT | SAFETY TYPE | POWER FACTOR | INGRESS PROTECTION | LIFETIME |
|---|---|---|---|---|---|---|---|---|---|---|
| 9121 | 10W LED | 3000K | 996 lm | 110° | 80 | ~220-240V, 50Hz | ⏚ | 0,9 | IP 54 | 20 000 h |
| 9120 | 15W LED | 3000K | 1035 lm | 110° | 80 | ~220-240V, 50Hz | ⏚ | 0,9 | IP 54 | 20 000 h |
| 9118 | 9W LED | 3000K | 520 lm | 39° | 80 | ~220-240V, 50Hz | ⏚ | 0,5 | IP 54 | 20 000 h |