
Pobrano z mamadecor.pl

CIRCOLO LED S
10928


CIRCOLO LED M
10815



CIRCOLO LED S

painted aluminum, plastic PC


10928 3000K 10930 4000K

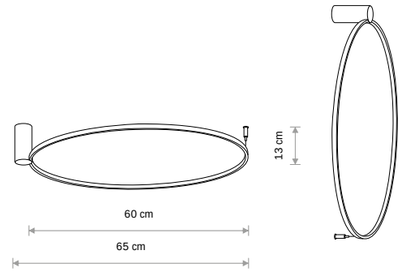

CIRCOLO LED M

painted aluminum, plastic PC

10815 3000K 10865 4000K



CIRCOLO LED XS

painted aluminum, plastic PMMA

10808 3000K 10858 4000K

CIRCOLO LED XS
10858

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10808	9W LED	3000K	190 lm	70 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10858	9W LED	4000K	200 lm	70 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10928	18W LED	3000K	560 lm	70 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10930	18W LED	4000K	600 lm	70 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10815	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10865	21W LED	4000K	700 lm	70 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h

BLACK P013 RAL 9005