

Pobrano z mamadecor.pl

CL ITAKA LED 40W

Ronrnax lnms`¸t.Hmrs`kk`shnm ldsgncr.⁀h ir ħķ ĭr ļid Ĩd


0- Fq`vhs`bximx v rtĭbhd j`rdsnmnvxl 5//w5// ll
1. Gravity mounting in coffered ceiling 600 mm x 600 mm
0-⁀v itd ĪĥtIh ĭķm ĭr ļid Ĩ ĥ ītvvr ļļķm ir ir ĭr ī5//w5// ĭĭ






1- Lnbnv`mhdy`onlnbɢroqɴ¸xmvrtĭbhdoncvhdry`mxl
2. Spring mounting in suspended ceiling
1-⁀v itd ĪĥtIh ĭķm ĭr ļid Ĩv ıĪītvd lJĨhm ittx ĨĪļī ir ir ĭīx





3. Zwieszenie na linkach stalowych
3. Suspended on steel wires
3.er ħĥhv īd ļd v id ĭĸļķ´ itrvd´

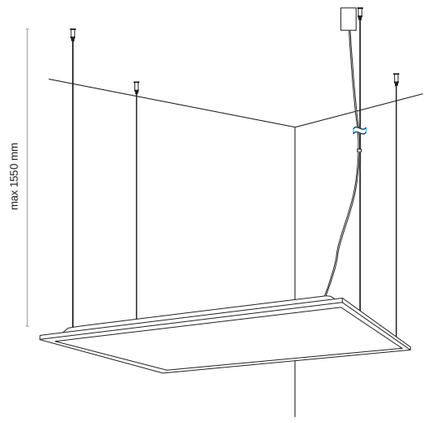

CL ITAKA POWER SUPPLY KIT

oqydvbc‹ rs`kk`jhdqnv`m` . vhqd‹o`hmsdc rsddk . it r ĥr ĭr id ‹Ĩd īĪtr ĥd id Ļv id ĭĸ

8280 ◯ WH

CL ITAKA SUSPENSION KIT

rs`k . rsddk . v id ĭĸ

8314 ◯ SI


CL ITAKA LED 40W, 100°

rs`kk`jhdqnv`m`‹OB . o`hmsdc rsddk‹OB . ĭd īĪtr ĥd id Ļv id ĭĸ‹OB

8460 ◯ WH - 3000K
8456 ◯ WH - 4000K


Item No.	POWER	COLOUR TEMP.	LUMEN	BEAM ANGLE	CRI	IP	LIFETIME	WARRANTY
8460	40W	3000K	4200	100°	Ã7/	20	50000h	5 YEARS
8456	40W	4000K	4200	100°	Ã7/	20	50000h	5 YEARS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

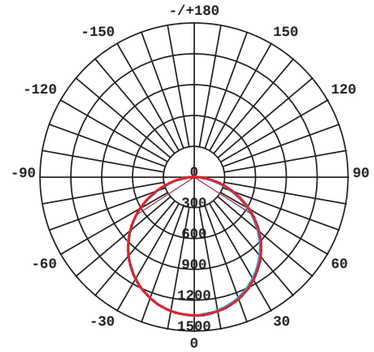


Luminous intensity [cd]
C0-C180
C90-C270

Beam cone diagram
Beam angle 100°

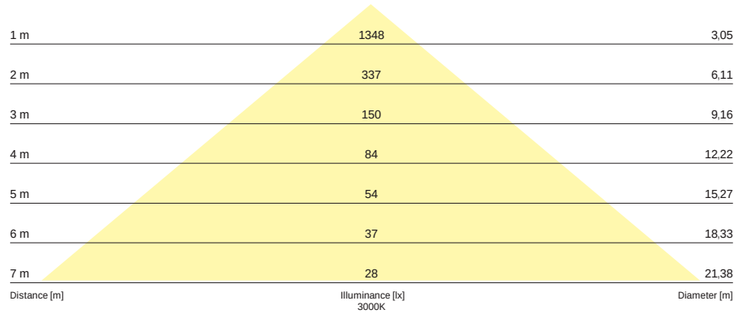


8460, 40W, 3000K, beam angle 100°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

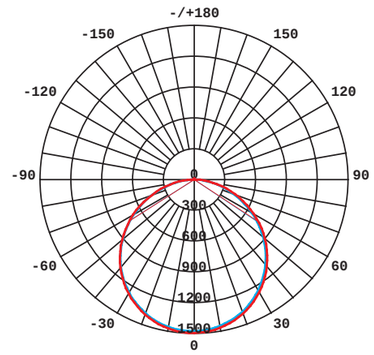

Luminous intensity [cd]
C0-C180
C90-C270

Beam cone diagram
Beam angle 100°

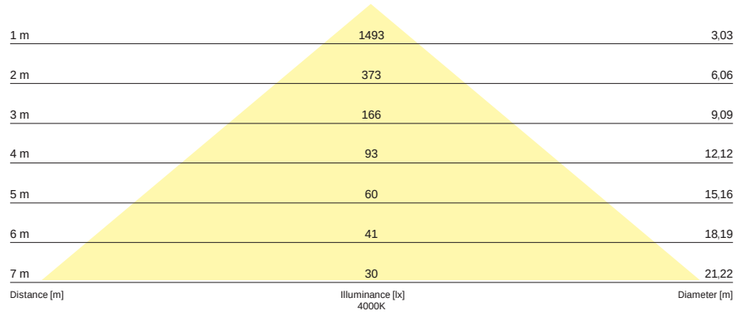

8456, 40W, 4000K, beam angle 100°