


Pobrano z mamadecor.pl

CL KEA LED 20W









CL KEA LED 20W


`kt lmht l+OB . `kt lmht l+OB .d ŤÍŤĮm+OB

8773 ◯ WH - 3000K

8772 ◯ WH - 4000K

Item No.	POWER	COLOUR TEMP.	LUMEN	BEAM ANGLE	CRI	IP	LED BRAND	DRIVER BRAND	LIFETIME	WARRANTY
8773	20W	3000K	1150	65°	Ă8/	44 / 20	SAMSUNG	OSRAM	50000h	5 YEARS
8772	20W	4000K	1150	65°	Ă8/	44 / 20	SAMSUNG	OSRAM	50000h	5 YEARS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

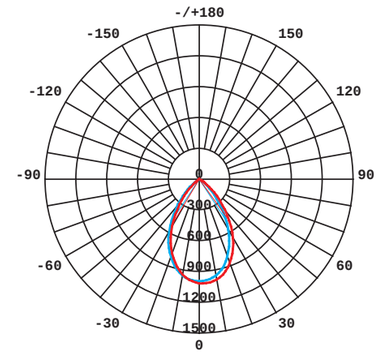


Beam cone diagram
Beam angle 65°

Distance [m]	Illuminance [lx] 3000K	Diameter [m]
1 m	1016	1,29
2 m	254	2,57
3 m	113	3,86
4 m	63	5,14
5 m	41	6,43
6 m	28	7,71
7 m	21	9,00

8773, 20W, 3000K, beam angle 65°

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

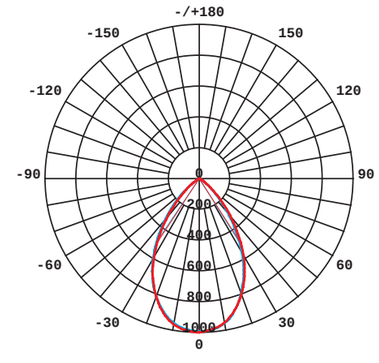

Beam cone diagram
Beam angle 65°

Distance [m]	Illuminance [lx] 4000K	Diameter [m]
1 m	998	1,30
2 m	249	2,59
3 m	111	3,89
4 m	62	5,19
5 m	40	6,49
6 m	28	7,78
7 m	20	9,08

8772, 20W, 4000K, beam angle 65°