

Pobrano z mamadecor.pl

CL KEA LED 30W




cut out ⌀140 mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

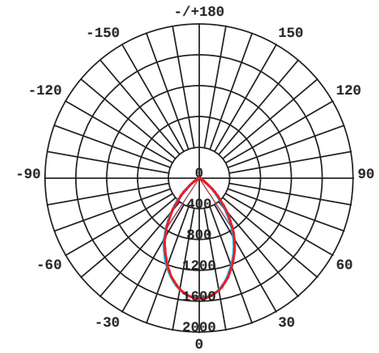


Luminous intensity [cd]
C0-C180
C90-C270


Beam cone diagram
Beam angle 65°

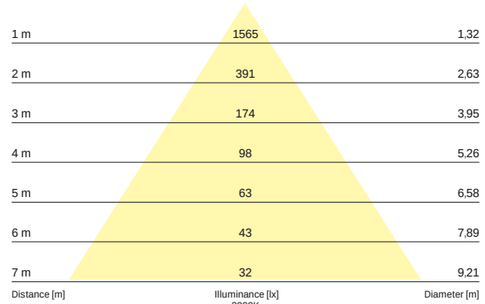

Distance [m]	Illuminance [lx] 3000K	Diameter [m]
1 m	1565	1,32
2 m	391	2,63
3 m	174	3,95
4 m	98	5,26
5 m	63	6,58
6 m	43	7,89
7 m	32	9,21

8771, 30W, 3000K, beam angle 65°





CL KEA LED 30W


`ŀt l ŀmŀt l ÷OB . `ŀt l ŀmt l ÷OB .ď Ť Í Ť Ť ĮŤ÷OB

8771 ◯ WH - 3000K

8770 ◯ WH - 4000K


Item No.	POWER	COLOUR TEMP.	LUMEN	BEAM ANGLE	CRI	IP	LED BRAND	DRIVER BRAND	LIFETIME	WARRANTY
8771	30W	3000K	1850	65°	Ă8/	44 / 20	SAMSUNG	OSRAM	50000h	5 YEARS
8770	30W	4000K	1850	65°	Ă8/	44 / 20	SAMSUNG	OSRAM	50000h	5 YEARS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

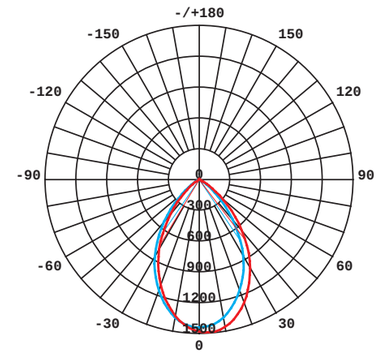

Luminous intensity [cd]
C0-C180
C90-C270

Beam cone diagram
Beam angle 65°

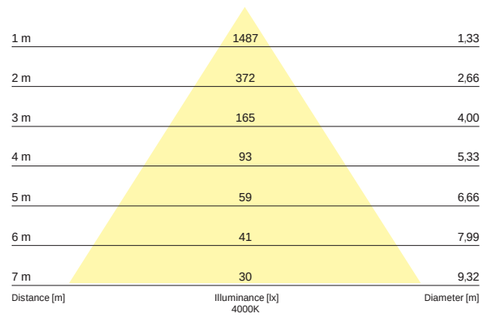

Distance [m]	Illuminance [lx] 4000K	Diameter [m]
1 m	1487	1,33
2 m	372	2,66
3 m	165	4,00
4 m	93	5,33
5 m	59	6,66
6 m	41	7,99
7 m	30	9,32

8770, 30W, 4000K, beam angle 65°