Pobrano z mamadecor.pl

INSTALLATION MANUAL

68070


LED BUILT IN | DIMMABLE | IK08 | QUICK FIX | 80 CRI | 36° | 42mm | 37mm

350mA | 1W | IP65 | Aluminium
Requires 350mA driver.

CE EAC UKCA RoHS COMPLIANT | DIMMABLE | 60mm | 200cm


FOR CONCRETE INSTALLATION

A

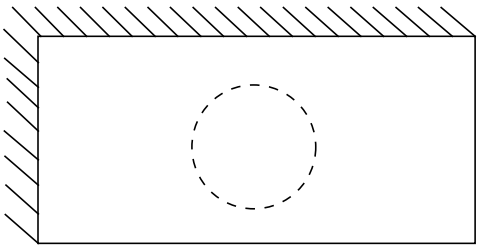


Hole required with diameter 35mm.

B

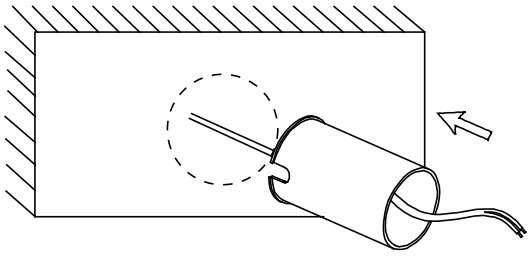


1. Insert cable through wall box
2. Insert wall box into the wall and secure with cement.

C

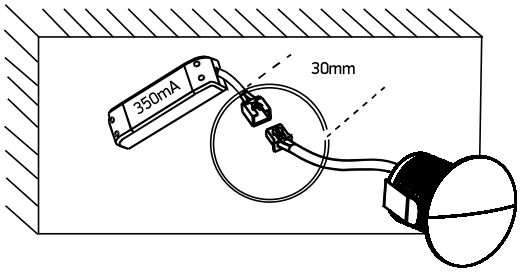

Connect and terminate wires to the terminal block connector.


D

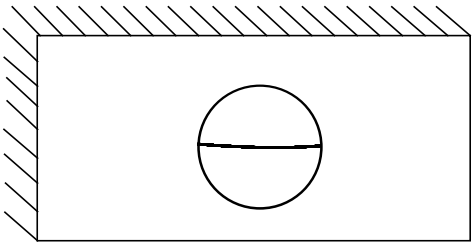

Secure the fitting into the wall box.


FOR GYPSUM INSTALLATION

A

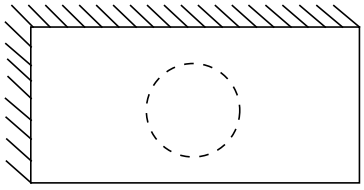


Mark gypsum board and cut hole with diameter 30mm.

B

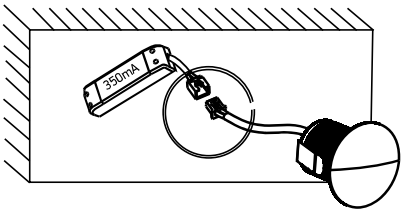

Connect and terminate wires to the terminal block connector.

C

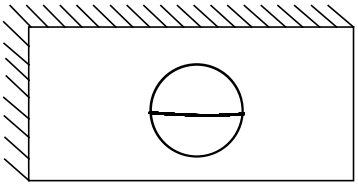

Insert fitting into the board until the clips snap into place.

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.