Pobrano z mamadecor.pl

Instruction leaflet

Mini Crescent Wall


10401

Commissioning

- Clqspc rf_r rfc rcp kgl_j `jmai amtcp gq ajgnncb `_ai into position.
- Jglc rfc npmbsar sn ugrf rfc qapcuq gl rfc u_jj, Ensure that the terminal block is properly located in the recess in the wall back.
- Eclrjw qjgbc rfc npmbsar glrm nmqgrgml, Sqgle rfc bmkc nuts and washers fix to the wall.
- Pcnj_ac dsqc mp agpasgr `pc_icp _lb qugraf ml, Wmsp light is now ready for use.

Fitting/replacing bulbs

- Ufcl af_legle _ `sj`* _ju_wq qugraf mdd _r rfc mains and allow the bulb to cool before handling.
  Sqcb `sj`q qfmsjb lmr `c bqqnmqcb md ugrf fmsqcfmjb waste. Please recycle where facilities exist.
- Bm lmr cvaccb rfc u_rr_ec qr_rcb mp sqc _ bqddcpclr shape bulb from that indicated on the fitting.
- Slqapcu rfc `sj` _lrg ajmaiugqc rm pckmtc,
- A_pcdsjjw jma_rc rfc `sj` gl rfc j_knfmjbcp _lb rspl clockwise to secure.



We recommend cleaning with a soft dry cloth.
Do not use solvents, liquids or abrasive cleaners as these could damage the finish and the product.

Recycling advice

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

For your safety, always switch off the supply before changing lightbulbs, or cleaning.

CE

Iss.2 02112016

Pobrano z mamadecor.pl

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This product is Double Insulated and does not require connection to an Earth circuit.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and **asppclr @sjjbgle Pcesj_rqmlq,**

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

If replacing an existing fitting, make a careful note of the connections.

Always use the correct type and wattage bulb. Exceeding the bulb wattage will damage the product.

When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully and responsibly.

This product is suitable for dimming when used in conjunction with a dimmable lamp. Please ensure verification of dimming abilities with the lamp manufacture prior to use.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Specification

Voltage:	240V 50Hz a.c.
J_kn8	**/ v 2. U C05 EJQ**
IP rating:	20


Layout

- **Nj_l rfc bcqgpcb j_wmsr md rfgq dgrrqle a_pcdsjjw*** ensuring the cables will reach the distance between the junction box and the light fitting
- **?tmgb jma_rqle _lw a_`jcq gl nmqgrqmlq rf_r umsjb** cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged
- **Kmslr msr md _pkq pc_af,**
- **A_`jcq gl u_jjq ksqr `c npmrcarcb sqgle qsgr_`jc** conduit or plastic trunking.
- **Rfc k_glq qsnnjw a_`jc ksqr f_tc _ kglgksk apmqq** sectional area of 1.0mmï¿½

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires**.

- **Fmjb rfc npmbsar gl nj_ac _lb k_pi rfc jma_rqml md** the fixing holes. Ensure that the product is level.
- **Clqspc rfc u_jj gq a_n_`jc md fmjbgle rfc ucgefr** of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.
- **Sqgle rfc qsnnjgcb qapcuq* qapcu glrm rfc u_jj slrgj** the collar just touches.
- **Ugpc _q bcr_gjcb `cjmu,**

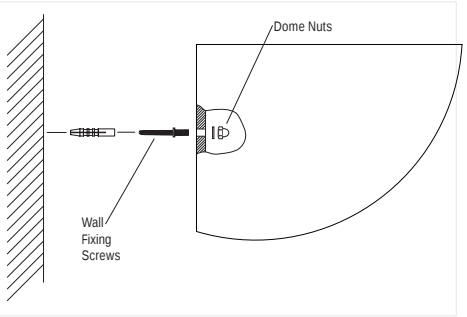

Wiring

This unit is double insulated and must not be earthed. If there are any incoming earth cables, they must be joined together and well insulated with good quality insulation tape. This is to ensure earth continuity throughout your property.

Having correctly identified the wiring from your existing light fitting and connect to the connection block inside the product in the following way:

Check that...

- **Wms f_tc ampgcarjw gbclrgdgcb rfc ugpcq,**
- The connections are tight.
- No loose strands have been left out of the connection block.