Pobrano z mamadecor.pl

Commissioning

- Pcdgr rfc nj_qrqa amtcp mtcp rfc rcpkgl_j `jmai _lb qcaspc in place using the screw. Refit the PIR in the slot.
- Pcdgr rfc dpmlr qcargml gl nj_ac* _lb pcdgr rfc qapcu _r rfc bottom.
- Pcnj_ac dsqc mp agpasgr `pc_icp _lb qugraf ml, Wmsp jgefr is now ready for use.


PIR Adjustment:

- Rfc slgr ksqr `c glqr_jjcb gl _ tcprga_j nmqgrgml*_lb dgrrcb 1.8m - 2.5m above the ground.
- Rfc N%P qclqmp a_l `c _bhsqrcb* _jjmugle rfc bcrcargml distance to be altered to suit the location. The detection angle is set at 120 degrees. The duration that the lamp stays on can also be altered from 5 seconds - 5 minutes. Sqc _ qk_jj qapcubpgtcp rm _bhsqr rfc ^R%KC% _lb ^QCLQ% qapcuq, Ufcl _bhsqrgle rfc qclqgrgtgrw &bcrcargml distance) in daylight it will be necessary to cover the sensor to simulate night time.

Fitting/replacing bulbs

- Ufcl af_legle _ `sj`* _ju_wq qugraf mdd _r rfc k_glq and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting.
- Bm lmr cvaccb rfc u_rr_ec qr_rcb mp sqc _ bgddcpclr qf_nc bulb from that indicated on the fitting.
- Slqapcu rfc `sj` _lrg ajmaiuggc rm pckmtc,
- A_pcdsjjw jma_rc rfc `sj` gl rfc j_knfmjbcp _lb rspl clockwise to secure.

60W E27 GLS



We recommend cleaning with a soft dry cloth.
Do not use solvents or abrasive cleaners as these could damage the finish.

Glass parts – Wash with warm water or just use a damp cloth. Do not use abrasive materials as these will damage the finish.

Recycling advice

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

For your safety, always switch off the supply before changing lightbulbs, or cleaning.

This bulb is protected by a glass shade. This part must be replaced immediately should the glass shade become cracked or damaged. This fitting must not be used without the glass shade in place.

Iss.3 24082015

Instruction leaflet

Traditional PIR Half-Lantern

1818PIR

CE

saxby lighting

Pobrano z mamadecor.pl

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and current Building Regulations.

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a fused circuit.

If replacing an existing fitting, make a careful note of the connections.

?ju_wq sqc rfc amppcar rwnc _lb u_rr_ec `sj`, Lctcp exceed the wattage stated.

When changing a bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully and responsibly.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

This product is rated at IP44.

This product is not suitable for location in or near a marine environment.

The entire unit gets hot whilst on for a period of time.

Specification

Voltage:	240V 50Hz a.c.
Lamp:	1 x 60W E27 GLS
IP rating:	44


Layout

- **Nj_l rfc bcqgpcb j_wmsr md rfgq dgrrgle a_pcdsjjw* clqspgle** the cables will reach the distance between the junction box and the light fitting
- **?tmgb jma_rgle _lw a_`jcq gl nmqgrgmlq rf_r umsjb a_sqc _ f_x_pb, Nmqgrgml a_`jcq _lb hslargml `mvcq &lmr** supplied) away from areas where they may be at risk from being cut, trapped or damaged
- **A_`jcq gl u_jjq ksqr `c npmrcarcb sqgle qsgr_`jc** conduit or plastic trunking.
- **Rfc k_glq qsnnjw a_`jc ksqr f_tc _ kglgksk apmqq** sectional area of 1.0mm¿½
- **Rfgq npmbsar f_q qncag_j npmrcargml _e_glqr rfc glepcqq** of moisture and is IP44 rated.

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires**.

- **Slbm rfc rmn $ `mrrmk qapcuq _lb pckmtc rfc dpmlr** section.
- **Fmjb rfc pc_p nj_rc gl nj_ac _lb k_pi rfc nmqgrgml md rfc** holes. Ensure that the product is level. Ensure the wall is capable of holding the weight of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.
- **Nsjj qsnnjw ugpcq rfpmsef ps``cp epmkkcr ml u_jj `_ai**
- **Dgv rfc u_jj `_ai rm rfc u_jj sqgle qapcuq _lb njseq,**
- **Qjgbc rfc NCP msr md rfc u_w* _lb slbm rfc qapcu** holding the plastic cover under the lampholder to expose the lampholder, and set aside.
- **Ugpc _q bcr_gjcb `cjmu,**

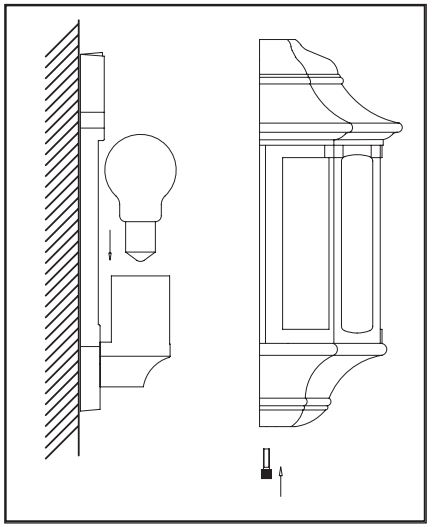

Wiring

Having correctly identified the wiring from your existing light fitting and connect to the connection block inside the product in the following way:

Check that...

- **Wms f_tc amppcarjw gbclrgdgcb rfc ugpcq,**
- The connections are tight.
- **Lm jmmqc qrp_lbq f_tc `ccl jcdr msr md rfc amllcargml** block.