Pobrano z mamadecor.pl

Commissioning

- Jydr rfc dpmlr n_pr md rfc npmbsar glrm nj_ac _lb dqv using the side screws.
- Pcnj_ac dsqc mp agpasgr `pc_icp _lb qugraf ml, Wmsp light is now ready for use.

Fitting/replacing bulbs

- This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

We recommend cleaning with a soft dry cloth.
Do not use solvents or abrasive cleaners as these could damage the finish.

Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

For your safety, always switch off the supply before changing lightbulbs, or cleaning.

Iss.1 11122012

Instruction leaflet

Shale Wall

46395

CE

saxby lighting

Pobrano z mamadecor.pl

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work.

This unit must be fitted by a competent and qualified electrician.

Install in accordance with IEE Wiring regulations and **asppclr @sjjbgle Pcesj_gmlq,**

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a circuit with a **1. k? PAB dgrrcb,**

If replacing an existing fitting, make a careful note of the connections.

This system contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

This product is not suitable for dimming.

Rfcqc npmbsarq qfmsjb lmr `c dgrrcb rm NCP agpasgrq mp short duration timed switches.

Specification

Voltage:	240V 50Hz a.c.
Lamp:	8W SMD 5630 LED's
IP rating:	20


Layout

- **Nj_l rfc bcqgpcb j_wmsr md rfgq dgrrgle a_pcdsjjw*** ensuring the cables will reach the distance between the junction box and the light fitting
- **?tmgb jma_rgle _lw a_`jcq gl nmqgrgmlq rf_r umsjb** cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged
- **A_`jcq gl u_jjq ksqr `c npmrcarcb sqgle qsgr_`jc** conduit or plastic trunking.
- **Rfc k_glq qsnnjw a_`jc ksqr f_tc _ kglgksk** apmqq sectional area of 1.0mmï¿½
- **Rfgq npmbsar gq lmr kmgqrspc npmmd* _lb qfmsjb lmr** be used in bathrooms.

Installation


Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires**.

- **Slbm rfc qgbc qapcuq _lb pckmtc rfc u_jj `_ai** from the product.
- **Fmjb rfc u_jj `_ai gl nmqgrgml _lb k_pi rfc jma_rgml** of the fixing holes.
- **Clqspc rfc u_jj gq a_n_`jc md fmjbgle rfc ucgefr** of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick or cavity walls. Ensure that the wall back is level.
- **Dgr rfc u_jj `_ai gl nmqgrgml,**
- **Ugpc _q bcr_gjcb `cjmu,**

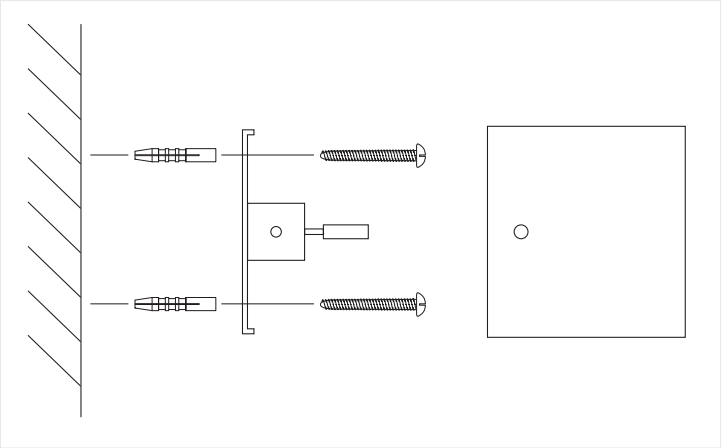

Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole and connect to the connection block inside the product in the following way:

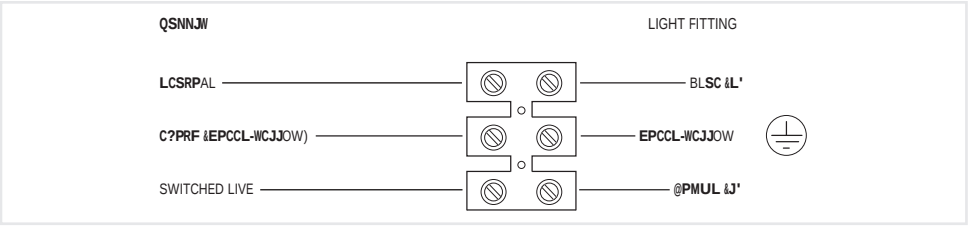

Check that...

- **Wms f_tc amppcarjw gbclrgdgcb rfc ugpcq,**
- The connections are tight.
- No loose strands have been left out of the connection block.