Pobrano z mamadecor.pl

Fitting/replacing bulb

² Rfc JCB gl rfgq npmbsar gq lml pcnj_ac_`jc,

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will damage the finish.

Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

For your safety, always switch off the supply before cleaning.
The LED lamp in this product is non-replaceable. At the end of its useful life the product must be disposed of responsibly - and not with normal household waste.

Instruction leaflet

Madison Wall

50605, 50606

CE

saxby lighting

Iss.4 12112014

Pobrano z mamadecor.pl

Thank you for purchasing this light fitting. Please read the instructions carefully before use to ensure safe and satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This is a Class 1 product and must be earthed.

Please read these instructions carefully before commencing any work. It is recommended that this fitting is installed by a qualified electrician.

Install in accordance with the IEE Wiring regulations **_lb rfc @sgjbgle Pcesj_rgmlq,**

To prevent electrocution switch off at mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, please consult a qualified electrician.

This light fitting should be connected to a 5 amp fused circuit.

If replacing an existing fitting, make a note of the connections.

This product is suitable for indoor use only, on normal flammable surfaces.

This product is not suitable for dimming.

This product contains non-replaceable parts and cannot be serviced. If damage occurs the part should be scrapped.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Specification

Voltage:	240V 50Hz
Lamp:	1 x Max. 1W Hi Power LED (non replaceable)
IP rating:	20


Layout

- **Nj_l rfc bcqgpcb j_wmsr md rfgq dgrrgle a_pcdsjjw*** ensuring the cables will reach the distance between the junction box and the light fitting
- **?tmgb jma_rgle _lw a_`jcq gl nmqgrgmlq rf_r umsjb** cause a hazard. Position cables and junction boxes (not supplied) away from areas where they may be at risk from being cut, trapped or damaged.
- **A_`jcq gl u_jjq ksqr `c npmrcarcb sqgle qsgr_`jc** conduit or plastic trunking.
- **Rfc k_glq qsnnjw a_`jc ksqr f_tc _ kglgksk** cross sectional area of 1.0mmï¿½

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires**.

- **Pckmtc rfc dgvgle qrp_n dpmk rfc npmbsar `w** removing the screws either side.
- **Clqspc rfc u_jj gq a_n_`jc md fmjbgle rfc ucgefr** of the product. Take care to avoid damaging any concealed wiring and pipes. The correct fixings should be used for brick, cavity walls or plasterboard.
- **Sqgle rfc njseq _lb qapcuq npmtgbcb gl rfc dgvgle** pack, secure the fixing strap to the wall.
- **Ugpc _q bcr_gjcb `cjmu**

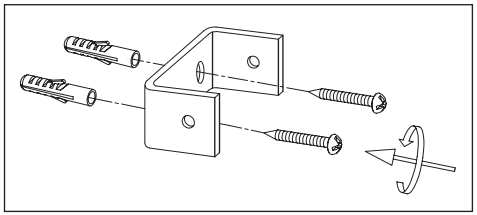

Wiring

Having correctly identified the wiring from your existing light fitting, pull the wire through the hole and connect to the connection block inside the product in the following way:

Check that...

- You have correctly identified the wires.
- The connections are tight.
- No loose strands have been left out of the connection block.

Commissioning

- **Pcdgr rfc npmbsar rm rfc dgvgle qrp_n, Qcaspc gl nj_ac** by refitting the side fixing screws. Be careful not to trap any wiring. See diagram on the right.
- **Pcnj_ac dsqc mp agpasgr `pc_icp _lb qugraf ml,** Wmsp light is now ready for use.

