Pobrano z mamadecor.pl

## Commissioning

² Pcdgr rfc qf_bc mlrm rfc u_jj `_ai,

² Pcnj_ac dsqc mp agpasgr `pc_icp _lb qugraf ml, Wmsp
light is now ready for use.

## Fitting/replacing bulbs

² Rfc JCBq gl rfgq npmbsar _pc lml pcnj_ac_`jc,

We recommend cleaning with a soft dry cloth.
Do not use solvents or abrasive cleaners as these could damage the finish.

## Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

## Safety information

For your safety, always switch off the supply before changing lightbulbs, or cleaning.

Instruction leaflet

# Crescent Wall

61636

CE

Iss.1 19062015

Pobrano z mamadecor.pl

**Rf_li wms dmp nspaf_qgle rfgq jgefr dqrrgle, Njc_qc pc_b rfc glqrpsargmlq a_pcdsjjw `cdmpc sqc rm clqspc q_dc _lb** satisfactory operation of this product. Please retain these instructions for future reference.

## Warning

**This product is Class 2 (Double insulated) and must not be earthed.**

Please read these instructions carefully before commencing any work.

**Rfgq slgr ksqr `c dqrrcb `w _ amkncrclr _lb os_jgdqcb** electrician.

Install in accordance with IEE Wiring regulations and **asppclr @sgjbgle Pcesj_rgmlq,**

**Rm npctclr cjcarpmasrgml qugraf** mdd **_r k_glq qsnnjw** before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, **njc_qc amlqsjr _ os_jgdqcb cjcarpgaq_l,**

**Rfgq jgefr dqrrgle qfmsjb `c amllcarcb rm _ agpasgr ugrf _ 1.k? PAB dqrrcb,**

If replacing an existing fitting, make a careful note of the connections.

**Rfgq qwqrck amlr_glq lml+pcnj_ac_`jc n_prq _lb** cannot be serviced. If damage occurs the part should be scrapped.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

**Rfgq npmbsar gq lmr qsgr_`jc dmp bgkkgle,**

## Specification

| | |
|---|---|
| Voltage: | 240V 50Hz a.c. |
| **J_kn8** | **0 v 0U JCB Fg Nmucp U_pk Ufgrc + 24.jk** |
| IP rating: | 20 |


## Layout

- **A_`jcq gl u_jjq ksqr `c npmrcarcb sqgle qsgr_`jc** conduit or plastic trunking.
- **Rfc k_glq qsnnjw a_`jc ksqr f_tc _ kglgksk apmqq** sectional area of 1.0mmï¿½

## Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires**.

- **Slbm rfc qapcuq _r rfc rmn _lb `mrrmk md rfc** product to separate the shade from the wall back.
- **Sqgle rfc u_jj `_ai _q _ rcknj_rc* k_pi rfc nmqgrgml** of the mounting holes.
- **Bpgjj fmjcq _lb dgr qsnnjgcb u_jj njseq &qsgr_`jc dmp k_qmlpw mljw + dmp mrfcp qspd_acq sqc _nnpmnpg_rc** fixings).
- **Ugpc _q bcr_gjcb `cjmu,**

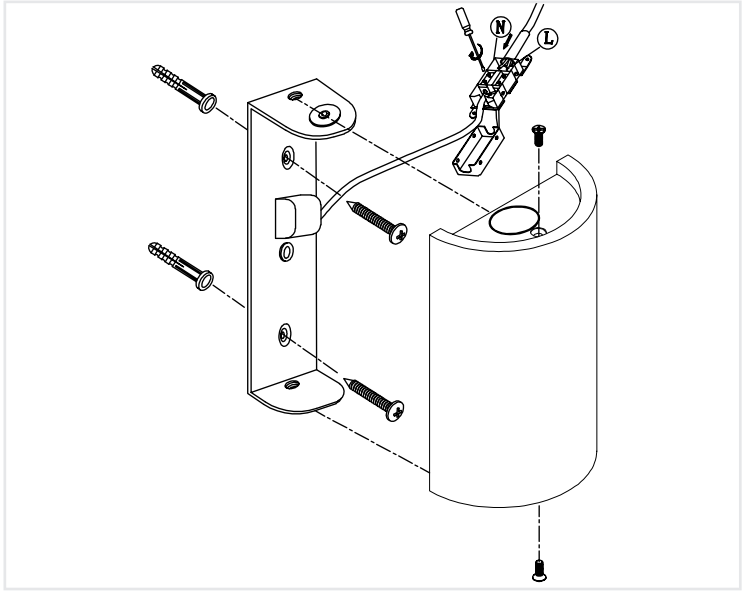


## Wiring

Having correctly identified the wiring from your light fitting, connect to the approved outdoor rated external terminal block in the following way:

## Check that...

- **Wms f_tc amppcarjw gbclrgdqcb rfc ugpcq**
- **Rfc amllcargmlq _pc rgefr**
- No loose strands have been left out of the connection block.
- **Rfc amtcp f_q `ccl pcdqrrcb mtcp rfc rcpkgl_j `jmai**