Pobrano z mamadecor.pl


Commissioning

- Pcdgr rfc npmbsar rm rfc `p_aicr,
- Pcnj_ac dsqc mp aggasgr `pc_icp _lb qugraf ml, Wmsp light is now ready for use.

Fitting/replacing bulbs - Max. 3.5W LED GU10 COB

- When changing a bulb, always switch off at the mains and allow the bulb to cool before handling. Dispose of used bulbs carefully. Do not exceed the wattage stated or use a different shape bulb from that indicated on the fitting.
- Ro access the bulb, remove the wire clip shown in the diagram overleaf. Set aside for refitting later.
- Pckmtc `sj` `w rsplgle _ os_prcp rspl _lrajmaiugqc and pulling out.
- Fit the new bulb, and secure in place by refitting the wire clip.
- Pcdgr rfc qc_j _lb jclq, Rgefrcl rfc qapcuq rm qcaspc in place.

3.5W GU10 COB



We recommend cleaning with a soft dry cloth.
Do not use solvents or abrasive cleaners as these could damage the finish.

Recycling advice



Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

Safety information

For your safety, always switch off the supply before changing lightbulbs, or cleaning.

Instruction leaflet

Salvo Wall

61640

CE

Iss.1 19062015

Pobrano z mamadecor.pl

Rf_li wms dmp nspaf_qgle rfgq jgefr dgrrgle, Njc_qc pc_b rfc glqrpsargmlq a_pcdsjjw `cdmpc sqc rm clqspc q_dc _lb satisfactory operation of this product. Please retain these instructions for future reference.

Warning

This product is Class 2 (Double insulated) and must not be earthed.

Please read these instructions carefully before commencing any work.

Rfgq slgr ksqr `c dgrrcb `w _ amkncrclr _lb os_jgdgcb electrician.

Install in accordance with IEE Wiring regulations and **asppclr @sgjbgle Pcesj_rgmlq,**

Rm npctclr cjcarpmasrgml qugraf mdd **_r k_glq qsnnjw** before installing or maintaining this fitting. Ensure other persons cannot restore the electrical supply without your knowledge. If you are in any doubt, **njc_qc amlqsjr _ os_jgdgcb cjcarpgaq_l,**

Rfgq jgefr dgrrgle qfmsjb `c amllcarcb rm _ agpasgr ugrf _ 1.k? PAB dgrrcb,

If replacing an existing fitting, make a careful note of the connections.

Rfgq qwqrck amlr_glq lml+pcnj_ac_`jc n_prq _lb cannot be serviced. If damage occurs the part should be scrapped.

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your local authority or retailer for recycling advice.

Rfgq npmbsar gq lmr qsgr_`jc dmp bgkkgle,

Specification

Voltage:	240V 50Hz a.c.
Lamp:	2 x Max. 3.5W GU10 COB
IP rating:	20


Layout

- **A_`jcq gl u_jjq ksqr `c npmrcarcb sqgle qsgr_`jc** conduit or plastic trunking.
- **Rfc k_glq qsnnjw a_`jc ksqr f_tc _ kglgksk apmqq** sectional area of 1.0mmï¿½

Installation

Existing fittings must be completely removed before installation of a new product. Before removing the existing fitting, **carefully note the position of each set of wires**.

- **Slbm rfc qapcuq _r rfc rmn _lb `mrrmk md rfc** product to separate the bracket from the product
- **Sqgle rfc `p_aicr _q _ rcknj_rc* k_pi rfc nmqgrgml md** the mounting holes.
- **Bpgjj fmjcq _lb dgr qsnnjgcb u_jj njseq &qsgr_`jc dmp k_qmlpw mljw + dmp mrfcp qspd_acq sqc _nnpmnpg_rc** fixings).
- **Ugpc _q bcr_gjcb `cjmu,**

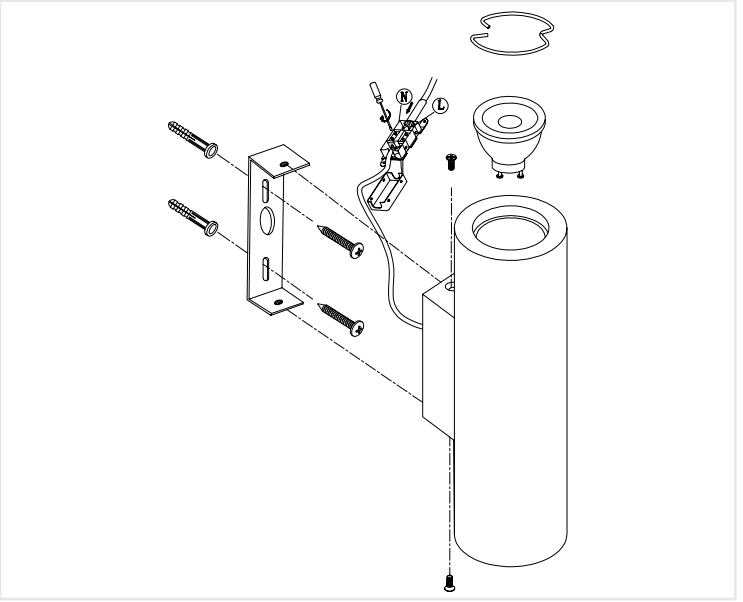

Wiring

Having correctly identified the wiring from your light fitting, connect to the approved outdoor rated external terminal block in the following way:

Check that...

- **Wms f_tc amppcarjw gbclrgdgcb rfc ugpcq**
- **Rfc amllcargmlq _pc rgefr**
- No loose strands have been left out of the connection block.
- **Rfc amtcp f_q `ccl pcdgrrcb mtcp rfc rcpkgl_j `jmai**